

EDEN

HOW TO REPLACE A GASLIFT ON AN OFFICE CHAIR



1. Flip the chair upside down and rest it on a flat surface.




2. Press down on the seat height adjustment lever to extend and loosen the gaslift.



3. Strike the rim of the bottom of the gaslift firmly with a hammer and pull the 5-star base upwards and off the gaslift.



4. Hold the gaslift while striking the metal mechanism around the point where the gaslift enters. The gaslift should pull out easily.

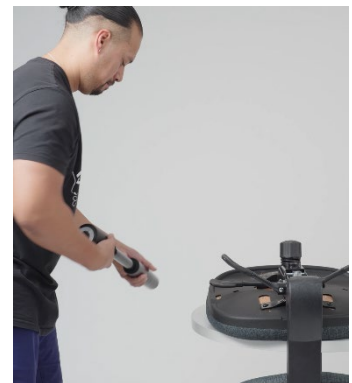


5. Remove the gaslift cover from around the old gaslift and place over the new gaslift.



6. Insert the new gaslift into the hole in the metal mechanism.



7. Place the 5-star base firmly onto the gaslift.

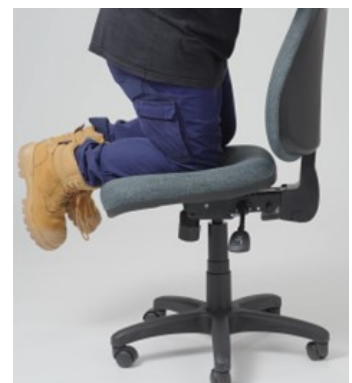

8. Turn the chair the right way up. Press down firmly on the seat with your knees to engage the gaslift.